


Microinverter

SUN600G3-US-220/EU-230

SUN800G3-US-220/EU-230 SUN1000G3-US-220/EU-230

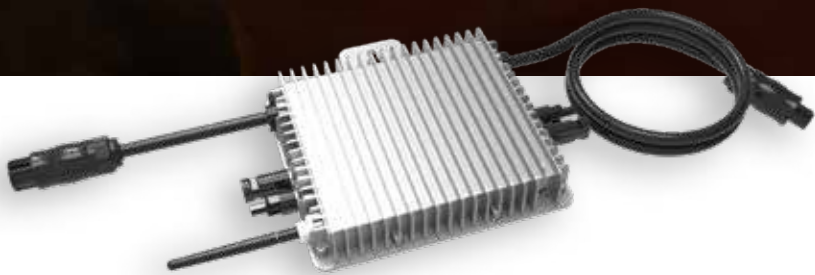

| Model | SUN600G3-US-220 | SUN600G3-EU-230 | SUN800G3-US-220 | SUN800G3-EU-230 | SUN1000G3-US-220 | SUN1000G3-EU-230 |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Input Data (DC) | | | | | | |
| Recommended input Power (STC) | 210~400W (2 Pieces) | | 210~500W (2 Pieces) | | 210~600W (2 Pieces) | |
| Maximum input DC Voltage | 60V | | | | | |
| MPPT Voltage Range | 25~55V | | | | | |
| Full Load DC Voltage Range (V) | 24.5~55V | | 33~55V | | 40~55V | |
| Max. DC Short Circuit Current | 2×19.5A | | | | | |
| Max. input Current | 2×13A | | | | | |
| | 2 | | | | | |
| | 1 | | | | | |
| Rated output Power | 600W | | 800W | | 1000W | |
| | 2.7A | 2.6A | 3.6A | 3.5A | 4.5A | 4.4A |
| Nominal Voltage / Range (this may vary with grid standards) | 220V/ 0.85Un-1.1Un | 230V/ 0.85Un-1.1Un | 220V/ 0.85Un-1.1Un | 230V/ 0.85Un-1.1Un | 220V/ 0.85Un-1.1Un | 230V/ 0.85Un-1.1Un |
| Nominal Frequency / Range | 50 / 60Hz | | | | | |
| Extended Frequency / Range | 45~55Hz / 55~65Hz | | | | | |
| Power Factor | >0.99 | | | | | |
| Maximum units per branch | 8 | | 6 | | 5 | |
| Efficiency | | | | | | |
| CEC Weighted Efficiency | 95% | | | | | |
| Peak Inverter Efficiency | 96.5% | | | | | |
| Static MPPT Efficiency | 99% | | | | | |
| Night Time Power Consumption | 50mW | | | | | |
| Ambient Temperature Range | | | | | | |
| Ambient Temperature Range | -40~65 | | | | | |
| Size (mm) | | | | | | |
| Size (mm) | | | | | | |
| Dimensions | | | | | | |
| Dimensions | | | | | | |